


C² 77


data sheet 1/95

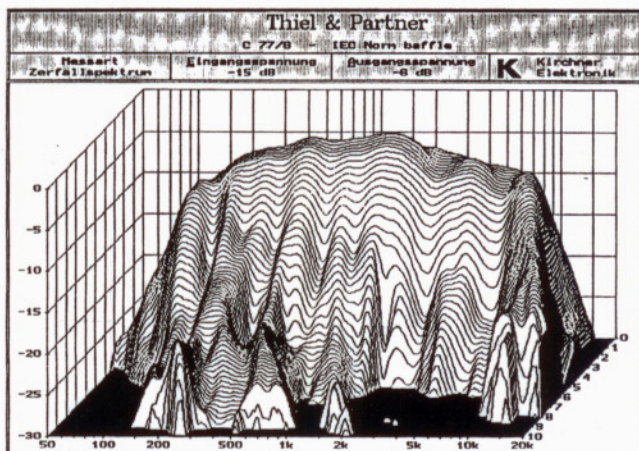

Ferrofluid filled midrange with 3-1/2 inch light weight concave ceramic dome. Usable in 3-way systems as midrange driver. High resolution and very good dispersion up to 5 kHz. Low resonance frequency allows second order filtering and a crossover frequency as low as 300 Hz. The ultra hard ceramic dome material moves like a piston in the recommended frequency band and the high internal sound velocity features very low distortion and virtually no coloration.

Recommended frequency range: 300 Hz - 5 kHz

Power handling, filtered	P	150	W
Sensitivity	E	88	dB
DC resistance	R	6,4	Ohm
mechanical Q	Qm	1,33	
electrical Q	Qes	2,07	
Q total	Qts	0,81	
resonance frequency	fres	185	Hz
Equivalent volume of air	Vas	0,77	l
Effective piston area	S	75,8	cm ²
Moving mass	Mms	7,6	g
Suspension Compliance	Cms	0,1	mm/N
Mechanical resistance	Rms	6,63	kg/s ⁻¹
Force factor	BL	5,23	NA ⁻¹
Flux density	B	1,15	T
Voice coil diameter	Ø	50,6	mm
Voice coil height	h	7,0	mm
Voice coil inductance	Lbm	0,12	mH
Weight of driver	M	1800	g

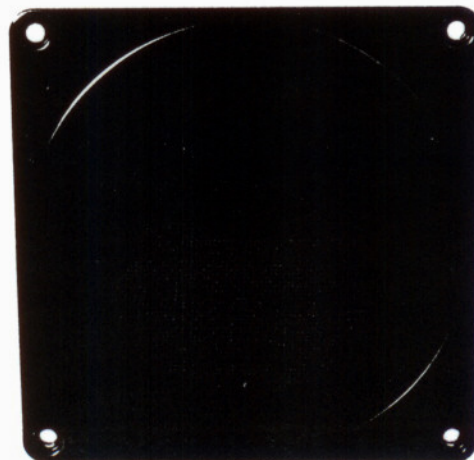


THIEL C² 77

Datei : C77.OSE

Werte : 400


Step response measurement, x-axis in msec, y-axis in mvolt

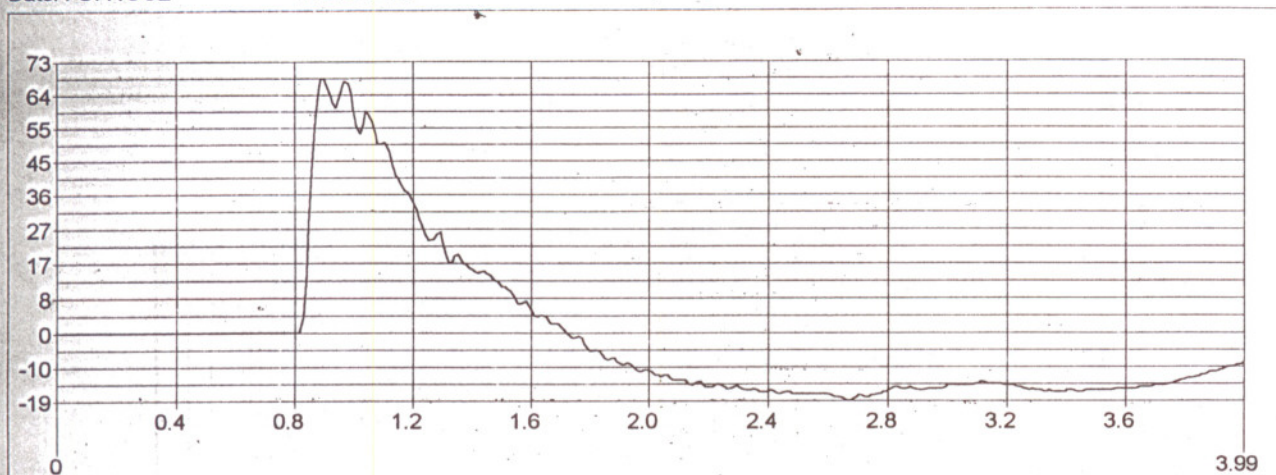

Datei : C77-8G.SIE

Werte : 250


Amplitude response, x-axis in Hz, y-axis in dB

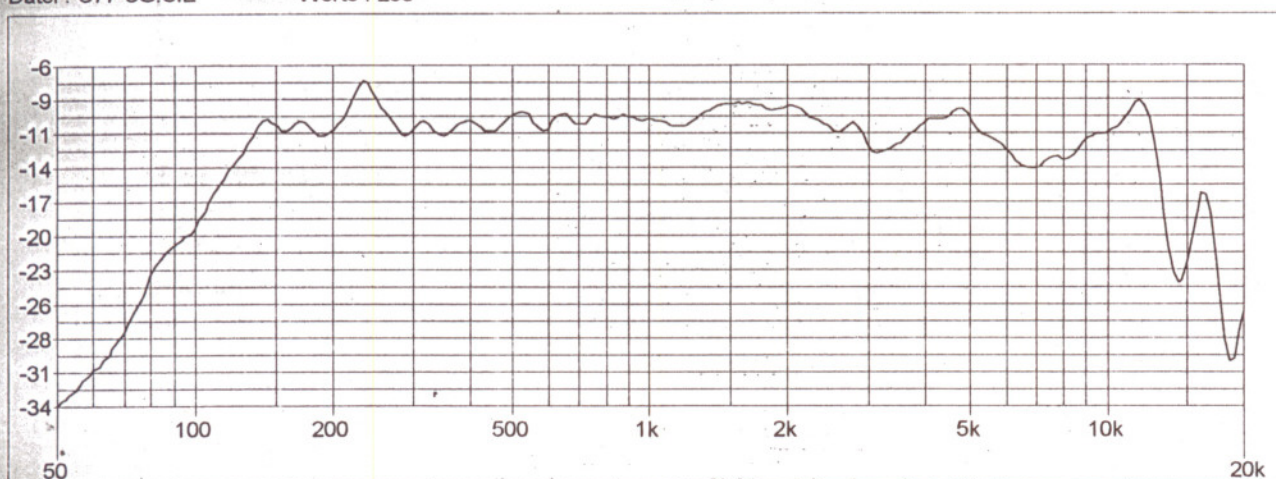

Datei : C77-8.IME


Werte : 250

Impedance, x-axis in Hz, y-axis in Ohms

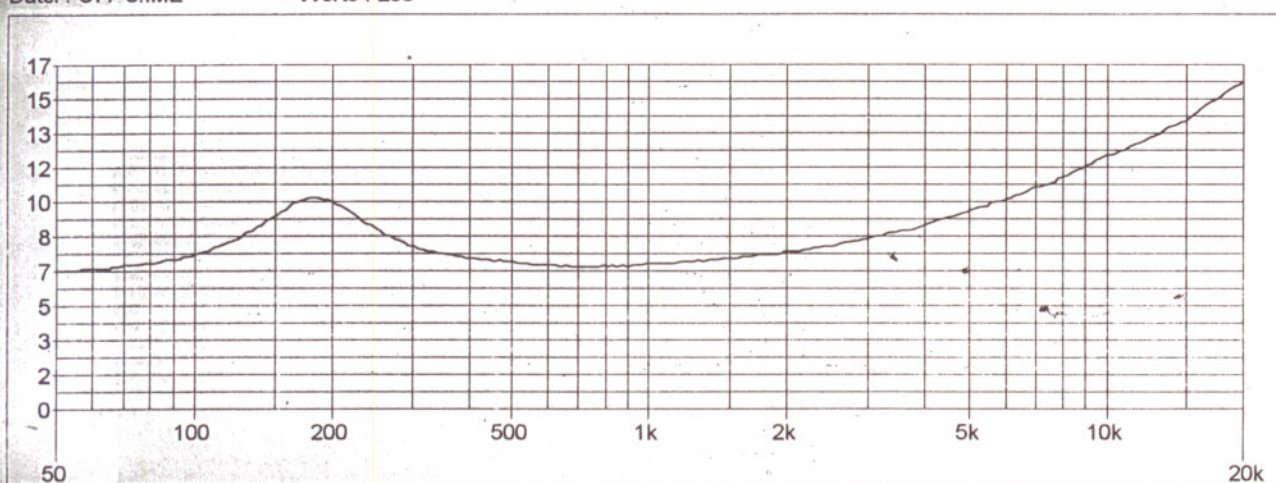

All acoustic measurements made with 1/4 inch Bruel & Kjaer microphone 4133 in 25 cm distance. Drivers are mounted in IEC norm-baffle unless otherwise stated. Data processing with Kirchner ATB 2.4 system.

data sheet 1/95

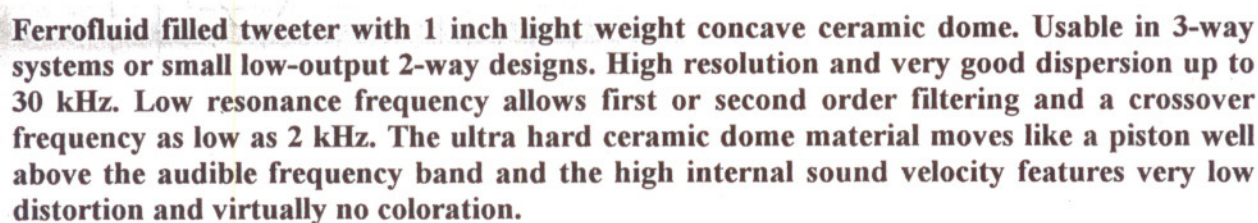


Recommended frequency range: 2 kHz - 30 kHz

THIEL C² 11

Datei : C11-8.OSE

Werte : 400


Step response measurement, x-axis in msec, y-axis in mvolt

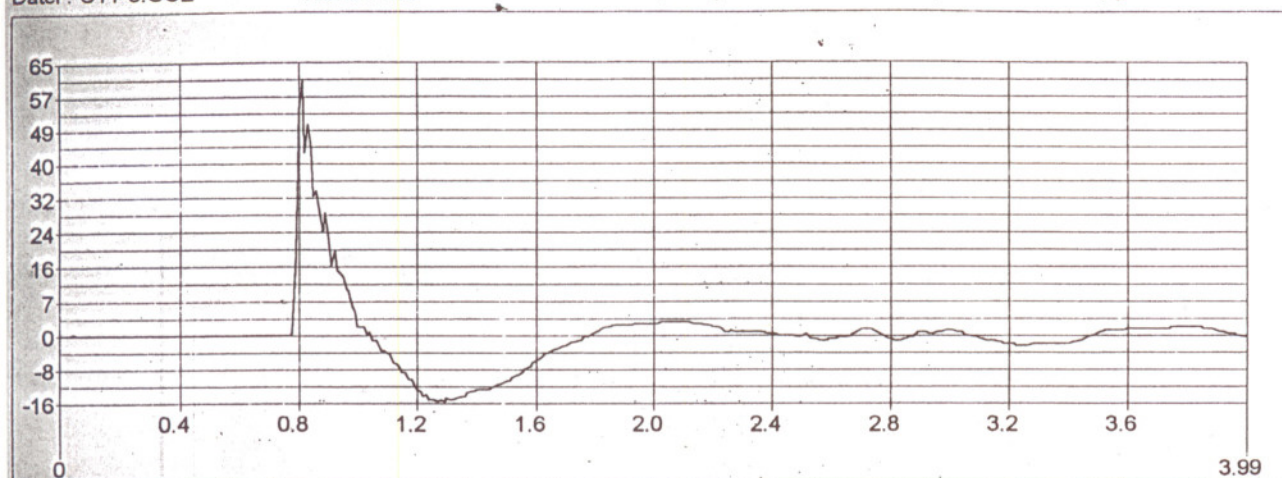

Datei : C11-8G.SIE

Werte : 250


Amplitude response, x-axis in Hz, y-axis in dB

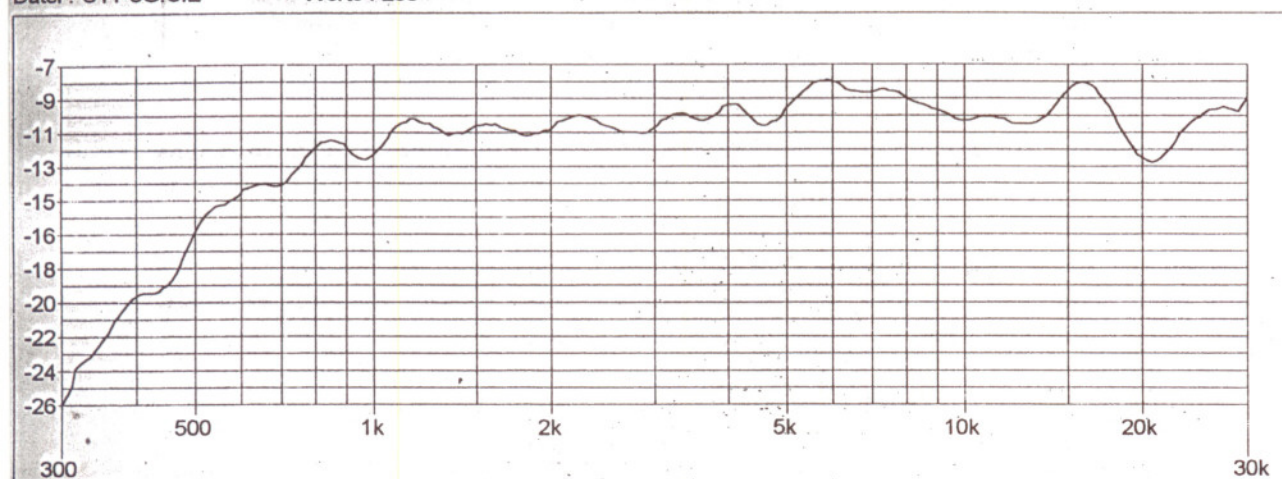

Datei : C11-8.IME

Werte : 250

Impedance, x-axis in Hz, y-axis in Ohms

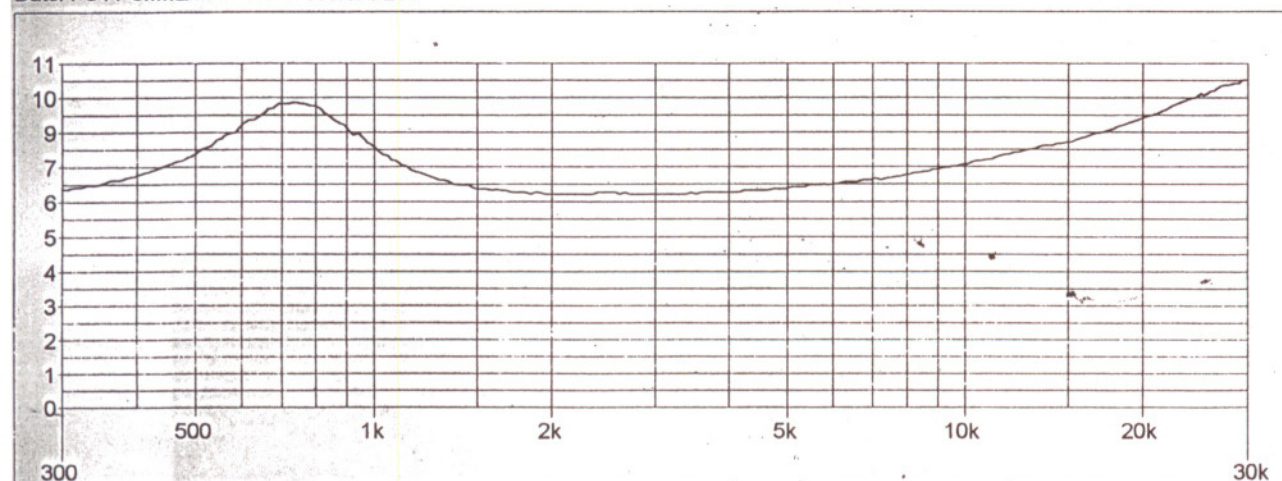

All acoustic measurements made with ½ inch Bruel & Kjaer microfone 4133 in 25 cm distance. Drivers are mounted in IEC norm-baffle unless otherwise stated. Data processing with Kirchner ATB 2.4 system.