





Toroidal transformer type 1N1729

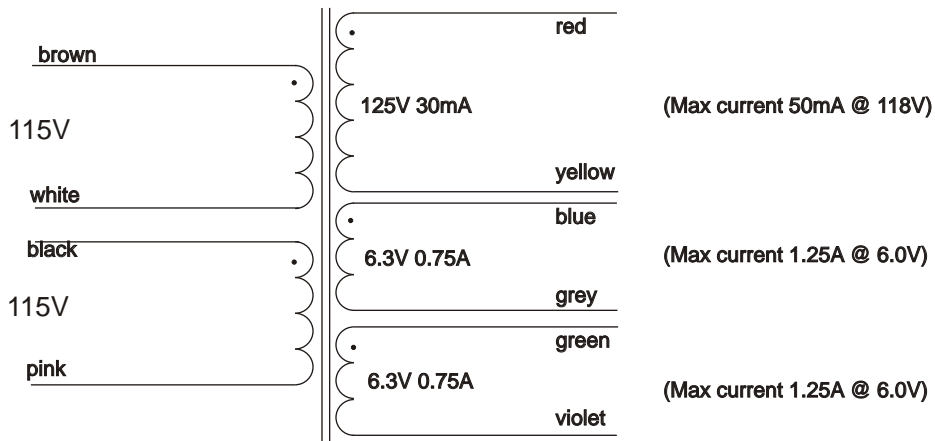

primaries in parallel for 115V operation



primaries in series for 230V operation

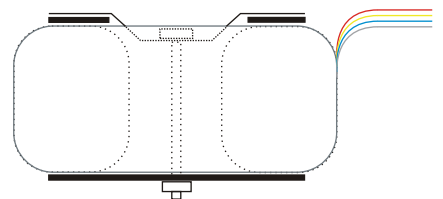


Diameter 70 mm
 Height 32 mm
 Weight 0.44kg
 Height and weight are measured without mounting materials
 All leads are solid and approx.200mm long

Supplied mounting materials:
 1 metal washer Ø5cm
 2 neoprene washers Ø5cm
 1 bolt M5x40 with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E320377.



Time lag fuses to be used.
 Primary:
 For 230V mains : 0.16A 5x20mm IEC127 high I²t-value.
 For 115V mains: 0.315A 5x20mm IEC127 high I²t-value.

Secondary: additional protection required for each secondary

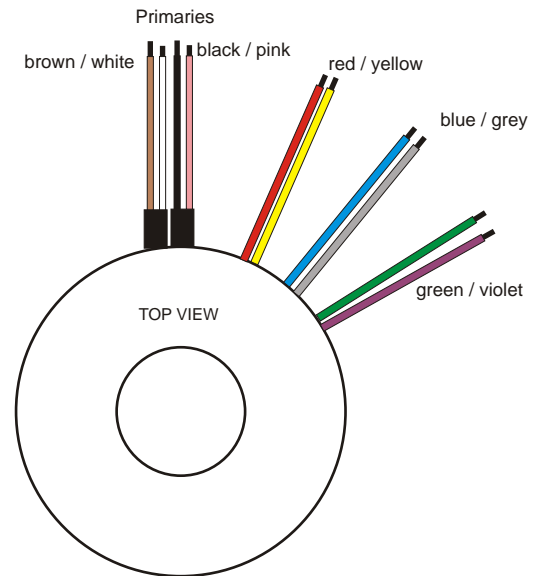

Type number	primary	secondaries	
		voltage	current
1N1729	2x 115V	125V	30mA
		6.3V	0.75A
		6.3V	0.75A

All voltages are under full ohmic load.
 Regulation : 8.5%
 Max. power rating : 22VA



Industrieweg 14
 NL-7161BX NEEDE
 The Netherlands

 P O - B o x 2 7
 NL-7160AA NEEDE
 The Netherlands
 Tel.+31 (0)545 283456
 Fax+31 (0)545 283457

 info@amplimo.nl
 http://www.amplimo.nl

HB April 2009

 © Copyright Amplimo BV

1N1729
 toroidal power transformer
 for valve-amplifiers