

Metal Shaft Potentiometer Rotary Motor-driven Type



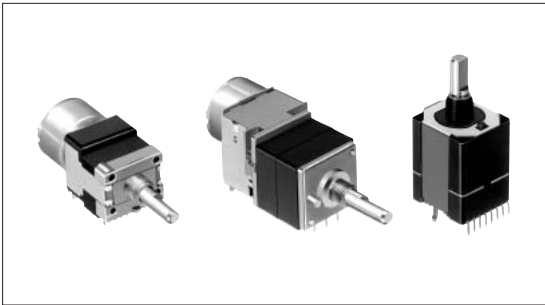
Available in a variety of models, for remote controls for various equipment.

Rotary Potentiometers

Slide Potentiometers

Multi Control Devices

Rotary Sensors
Linear Sensors



Features

- Remote-controllable potentiometers for various audio products.
- Supports motor driving and manual operation.
- The small build-in DC motor enables axis rotation with a high-speed follow-up of 300° per second (RK25T).
- Good manual operation feel (RK25T).
- For servo track+touch sensitivity applications, an audio track combination is also available (RK25T).

Applications

- Volume control in amplifiers, CD players, karaoke, etc.
- Various controls for professional audio equipment such as mixing console and guitar amplifiers (RK25T).

Metal Shaft

Insulated Shaft

Knob Operating

Typical Specifications

Items	Specifications		
	RK16	RK27	RK25
Total resistance tolerance	$\pm 20\%$		
Maximum operating voltage	50V AC	30V AC	5V DC
Total rotational angle	$300 \pm 5^\circ$		
Rotational torque	15 to 45 mN·m		0.5 to 7.5 mN·m
Operating life	15,000 cycles		100,000 cycles
Operating temperature range	-10°C to $+70^\circ\text{C}$		-10°C to $+60^\circ\text{C}$
Motor voltage	4 to 6 (Standard : 4.5) V DC		4.5 to 5.5 (Standard : 5) V DC
Potentiometer rotational speed (sec/300°)	12 ± 3 (4.5V DC)		1max. (5V DC)
Maximum operating current	At rotation : 100 mA At end slip : 150 mA		2,000 mA

Recommended Products List


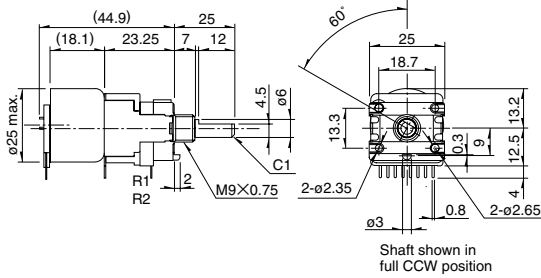

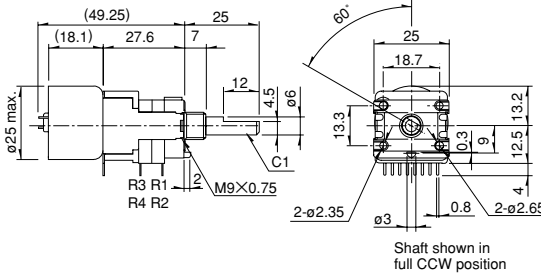

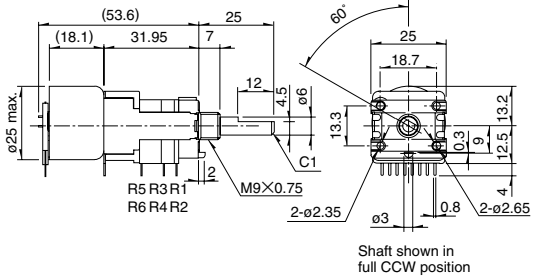

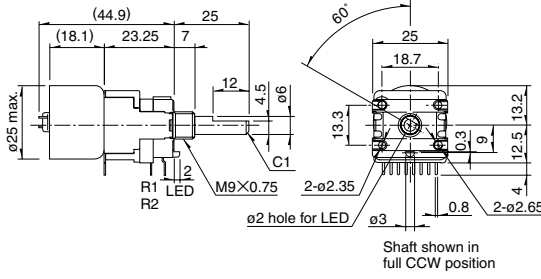

Type	Model	Number of resistor elements	Products No.	Shaft type	Length of the shaft (mm)	Total resistance (kΩ)	Resistance taper	Illumination function	Motor print terminal	Minimum packing unit (pcs.)	Drawing No.
16mm size	RK1681□MG0	Dual-unit	RK16812MG099	Flat	25	100	3B	Without	With	200	1
		Quad-unit	RK16814MG02R			20	15A		Without		2
		6 ganged-unit	RK16816MGA04			100	3B		With		3
	RK1681□MGL	Dual-unit	RK16812MGL2K			50		With (Red)	Without		4
25mm size	RK25T	Single-unit	RK25T11M0001		20	10	1B	Without	With	210	5
27mm size	RK27112MC0	Dual-unit	RK27112MC030		25	100	15A		Without	Without	150

For attached parts, see P.48

ALPS

Dimensions

Unit:mm

No.	Photo	Style	PC board mounting hole dimensions (Viewed from mounting side)
1	16mm size Single-shaft, dual-unit RK16812MG 	 Shaft shown in full CCW position	 2-2.6X1.2 square holes Mounting surface COM 2-ø1.2 holes 8-ø1 holes 2-dummy R1 ① ② ③ R2 1 2 3
2	16mm size Single-shaft, quad-unit RK16814MG 	 Shaft shown in full CCW position	 2-2.6X1.2 square holes Mounting surface COM 4-dummy 16-ø1 holes R1 R3 ① ② ③ R2 R4 1 2 3
3	16mm size Single-shaft, triple-unit RK16816MG 	 Shaft shown in full CCW position	 2-2.6X1.2 square holes Mounting surface COM 2-ø1.2 holes 6-dummy 24-ø1 holes R1 R3 R5 ① ② ③ R2 R4 R6 1 2 3
4	16mm size Single-shaft, dual-unit Illuminated, through-shaft type RK16812MGL 	 Shaft shown in full CCW position	 2-2.6X1.2 square holes Mounting surface COM 10-ø1 holes 2-dummy R1 ① ② ③ R2 1 2 3

Rotary
Potentiometers
Slide
Potentiometers
Multi Control
Devices
Rotary Sensors
Linear Sensors

Metal
Shaft
Insulated
Shaft
Knob
Operating

Metal Shaft
Insulated Shaft
Knob Operating

Unit:mm

Unit:mmUnit:mmUnit:mm

Product Varieties

In addition to the recommended products, the following specifications can also be accommodated.

Basic Motor Specifications

Type	Number of unit	Model	Motor type		Motor voltage	Potentiometer rotational speed	Max. operating current
			Sealed case	Motor printed terminal			
16mm size	Single-shaft, dual-unit	RK16812MG	Available	Available	4 to 6V DC (Standard:4.5)	12±3sec/300° (4.5V DC)	At rotation 100mA At end slip 150mA (4.5V DC)
	Single-shaft, quad.-unit	RK16814MG					
	Single-shaft, 5-ganged-unit	RK16815MG					
	Single-shaft, 6-ganged-unit	RK16816MG					
16mm size illuminated, through-shaft type	Single-shaft, dual-unit	RK16812MGL					
	Single-shaft, quad.-unit	RK16814MGL					
	Single-shaft, 5-ganged-unit	RK16815MGL					
27mm size	Single-shaft, dual-unit	RK27112MC					
	Single-shaft, quad.-unit	RK27114MC					
25mm size	Single-shaft, single-unit	RK25T11M0	Not available	With	5V DC	1sec/300°	2000mA

Rotary Potentiometers

Slide Potentiometers

Multi Control Devices

Rotary Sensors
Linear Sensors

Metal Shaft

Insulated Shaft

Knob Operating

Total Resistance Variety

Total resistance (kΩ)	10	20	50	100
-----------------------	----	----	----	-----

Resistance Taper

Resistance taper	15A	3B
------------------	-----	----

Note

Shows the specification recommended by us.

Products Specifications

Rotary Potentiometers

Slide Potentiometers

Multi Control Devices

Rotary Sensors

Linear Sensors

Metal Shaft

Insulated Shaft

Knob Operating

Model			RK09L	RK097 RK098	RK117	RK163 RK168
Items						
Operating temperature range			−10℃ to +70℃			
Electrical performance	Total resistance tolerance		±20%			
	Rated power		0.05W			
	Maximum operating voltage		50V AC			RK163 :150V AC RK168 : 50V AC
	Residual resistance		R≤10kΩ 20Ω max. 10kΩ < R≤50kΩ 30Ω max. 50kΩ < R Nominal total resistance of 0.1% or less			
	Maximum attenuation (Volume control)		5kΩ ≤R< 10kΩ 70dB min. 10kΩ ≤R< 50kΩ 80dB min. 50kΩ ≤R< 100kΩ 90dB min. 100kΩ ≤R 100dB min.			
	Insulation resistance		100MΩ min. 250V DC			100MΩ min. 500V DC
	Voltage proof		1 minute 300V AC			1 minute 500V AC
Mechanical performance	Total rotational angle		300±5°	300±5° (Shaft movement type is 300 ^{+10°} _{−5°})	300 ^{+10°} _{−5°}	300±5°
	Rotational torque		2 to 25mN•m			RK163 : 2 to 25mN•m RK168 : 15 to 45mN•m
	Stopper strength		0.5N•m (For shaft movable type,0.4N•m)			0.9N•m
	Push-pull strength		80N max.	100N max.		
	Vibration		10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z and for 2 hours respectively			
	Solder heat resistance	Manual soldering	350℃ max. 3s max.			
		Dip soldering	260±5℃ 4±1s			—
Endurance	Operating life		15,000 cycles			
Environ- mental test	Cold		−10℃ for 96h			
	Long-term heat resistance		+70℃ for 96h			
	Moisture resistance		+40±2℃, 90 to 95%RH for 96h			

Products Specifications

Model			RK20B	RK25T	RK271	RK501
Items						
Operating temperature range			−10℃ to +105℃	−10℃ to +60℃	−10℃ to +70℃	
Electrical performance	Total resistance tolerance		±20%			
	Rated power		0.06W	0.05W		0.1W
	Maximum operating voltage		20V DC	5V DC	30V AC	150V AC
	Residual resistance				R≤10kΩ 20Ω max. 10kΩ<R≤50kΩ 30Ω max. 50kΩ<R 0.1% or less of nominal total resistance	
	Maximum attenuation (Volume control)				5kΩ≤R< 10kΩ 70dB min. 10kΩ≤R< 50kΩ 80dB min. 50kΩ≤R<100kΩ 90dB min. 100kΩ≤R 100dB min.	120dB min.
	Insulation resistance		100MΩ min. 250V DC		100MΩ min. 500V DC	
	Voltage proof		1 minute 300V AC		1 minute 500V AC	
Mechanical performance	Total rotational angle		360°	300±5°	300±3° Motor-driven 300±5°	300±3°
	Rotational torque (mN·m)		20 to 80	0.5 to 7.5	5 to 35 Motor-driven 15 to 45	13 to 43
	Stopper strength (N·m)		—	0.5	0.9	1.5
	Push-pull strength		100N max.			150N max.
	Vibration		10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z and for 2 hours respectively			
	Solder heat resistance	Manual soldering	350℃ max. 3s max.			
		Dip soldering (Dip available products)	260±5℃, 4±1s		—	260±5℃, 4±1s
Endurance	Operating life		15,000 cycles	100,000 cycles	15,000 cycles	
Environmental test	Cold		−10℃ for 96h			
	Long-term heat resistance		+105℃ for 96h	+70℃ for 96h		
	Moisture resistance		+40±2℃, 90 to 95%RH for 96h			

Rotary Potentiometers

Slide Potentiometers

Multi Control Devices

Rotary Sensors
Linear Sensors

Metal Shaft

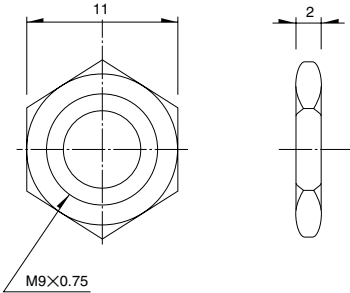

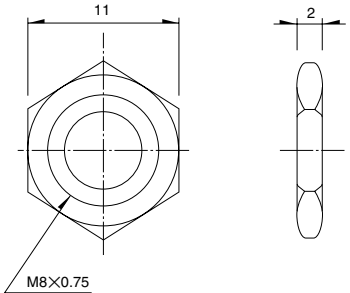

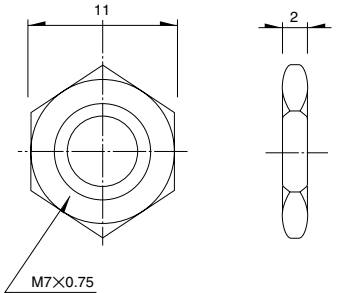

Insulated Shaft

Knob Operating

Attached Parts

These parts are attached to the following products.

Unit:mm

Applicable products	Bearing screw diameter	Hexagonal nut	Flat washer
RK09L RK168 RK097	M9		
RK271	M8		
RK097 RK098 RK163	M7		
RK097 RK098	M6	