


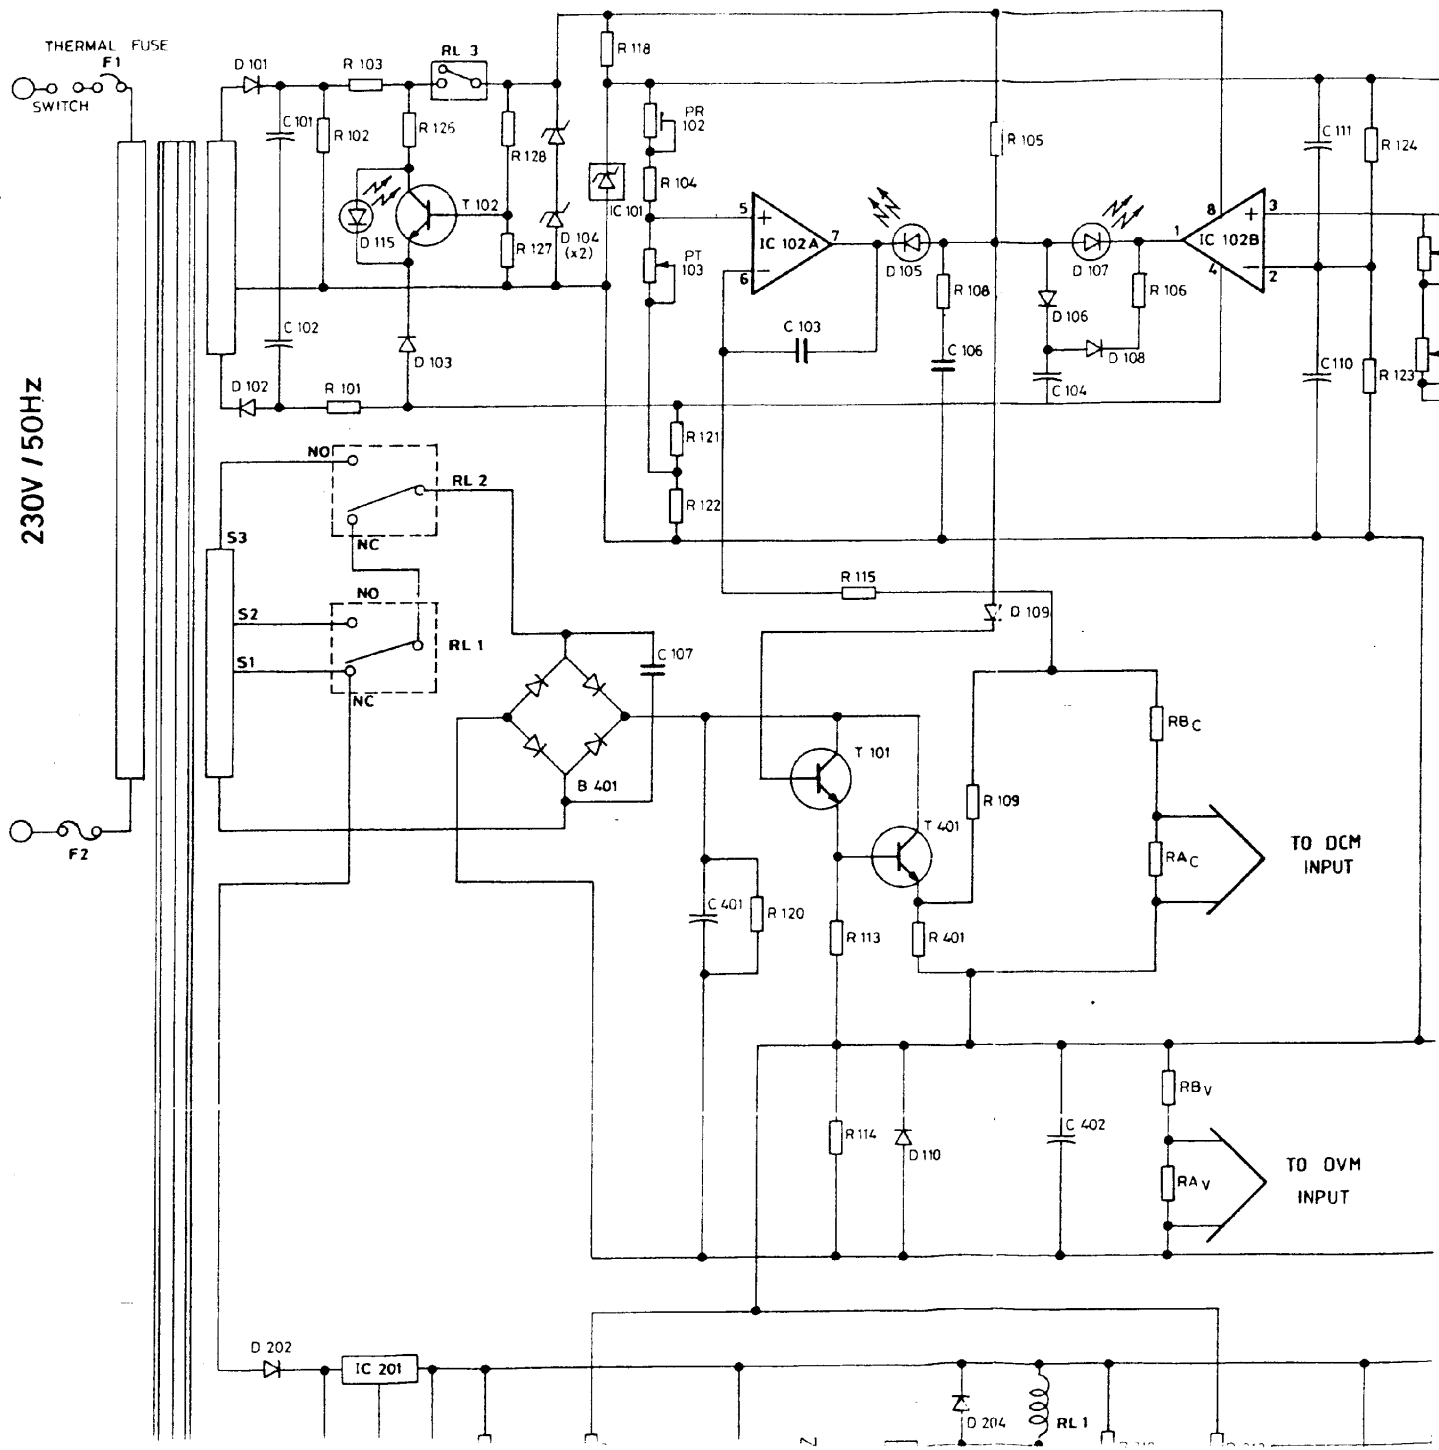


230V / 50Hz

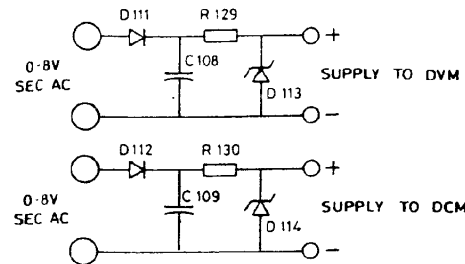

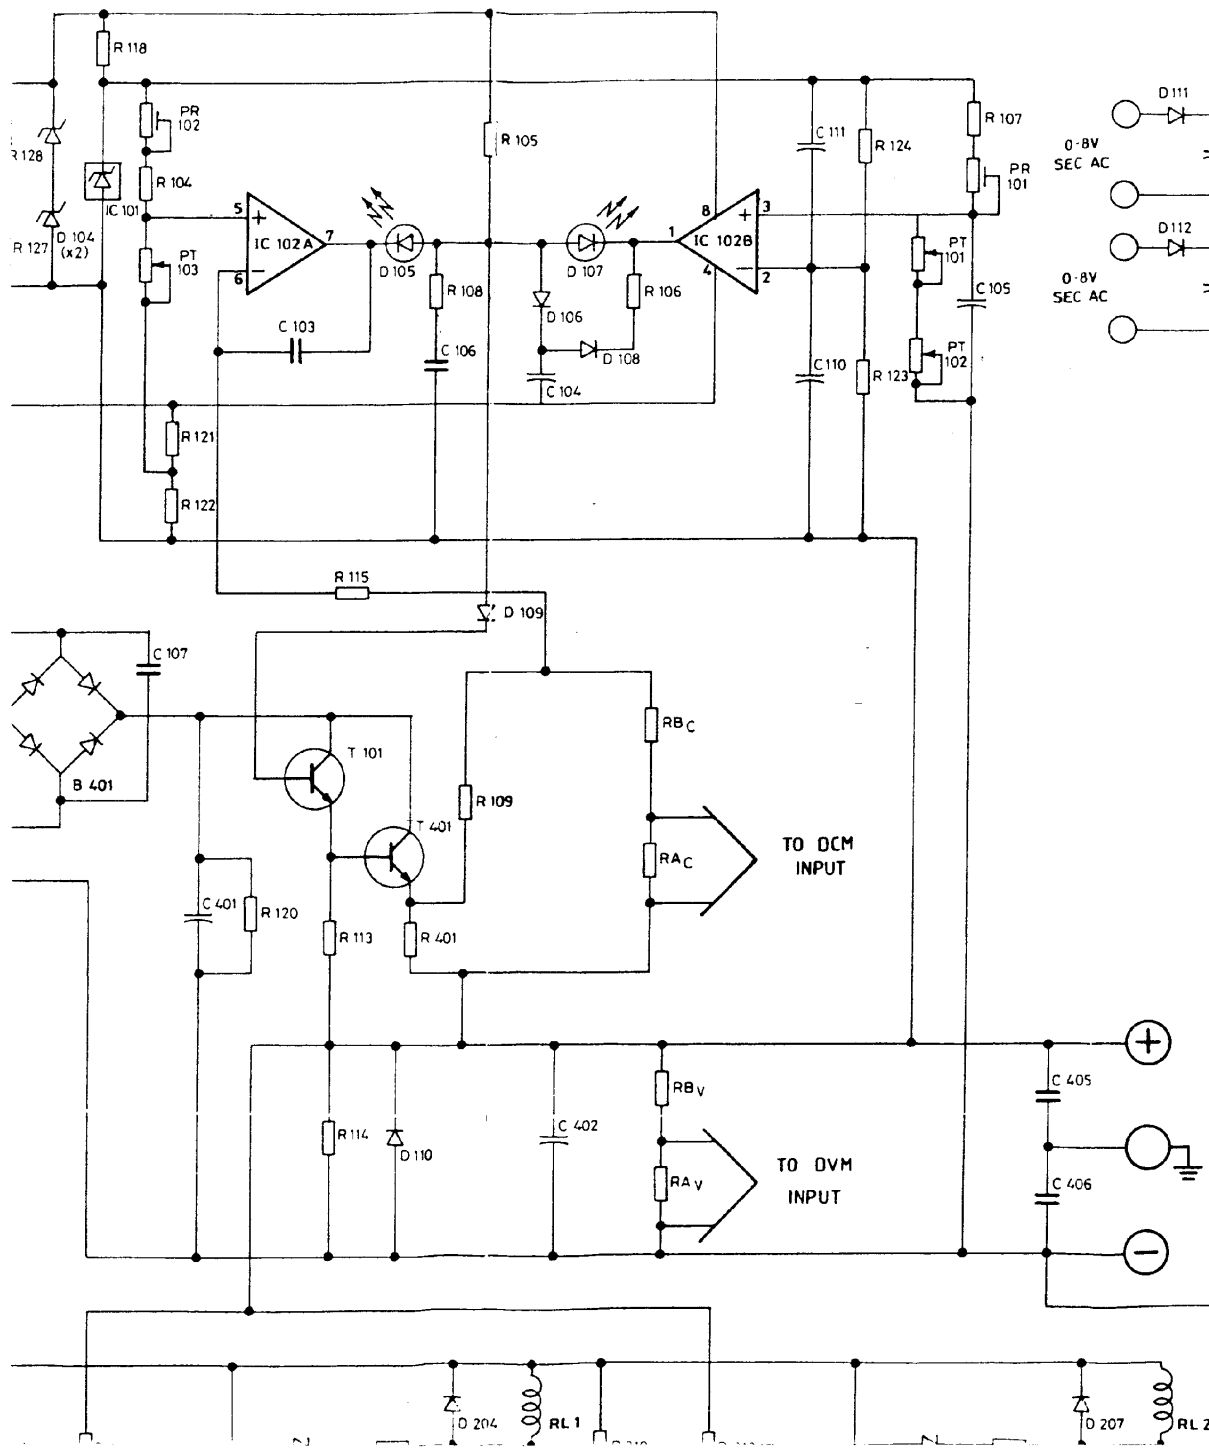

R 101	220Ω 1/2W	R 401	0.22Ω 5W	D 201	—
R 102	4K7	R 402	—	D 202	—
R 103	390Ω 1/2W	R 403	—	D 203	1N 4002
R 104	150K/180K/220K	R 404	—	D 204	—
R 105	1K5	R 405	—	D 205	6.2V FZ
R 106	3K3			D 206	1N 4002
R 107	470Ω/560Ω/680			D 207	—
R 108	33K			D 208	6.2V FZ
R 109	—	C 101	220 / 25V		
R 110	—	C 102	1000 / 16V	B 401	LT 4A 03(x4)
R 111	—	C 103	10KPF		
R 112	100Ω	C 104	100 / 35V	T 101	TIP 31A
R 113	1K2	C 105	1 / 63V	T 102	2 SC 2236
R 114	10K	C 106	10 KPF		
R 115	330Ω (MFR)	C 107	0.22μF / 100V		
R 116	—	C 110	—	T 201	2 SD 468C
R 117	—	C 111	220 / 35V	T 202	2 SD 468C
R 118	1K5 (MFR)				
R 119	—	C 201	470μF / 35V	T 401	2N 3773
R 120	8K2 1W	C 202	100 KPF		
R 121	33K (MFR)	C 203	10 / 16V	IC 101	LM 336 (2.5V)
R 122	220Ω (MFR)	C 204	10 / 16V	IC 102A	LM 1458
R 123	470Ω (MFR)			IC 102B	—
R 124	6K8 (MFR)				
R 125	—			IC 201	7812
R 126	10K	C 401	3300 / 80V	IC 202	LM 1458
R 127	4K7	C 402	100 / 50V		
R 128	4K7	C 403	10 KPF	RL 1	12V RELAY
		C 404	—	RL 2	—
				RL 3	THERMAL RELAY
R 201	4K7			F 1	3.5 AMPS
R 202	3K3	D 101	—	F 2	3.0 AMPS
R 203	10K	D 102	1N 4002		FAST BLOW
R 204	56K	D 103	6.2V FZ		
R 205	33K	D 104	12V FZ		
R 206	10K	D 105	LED (RED)	DPM PCB	
R 207	100K	D 106	1N 4148	R 126	100Ω 1/4W
R 208	3K3	D 109	LED (GREEN)	R 127	—
R 209	10K	D 108	1N 4002	C 108	100 / 16V
R 210	4K7	D 109	—	C 109	—
R 211	3K3	D 110	LT 4A 03	D 111	1N 4002
R 212	10K	D 111	—	D 112	—
R 213	47K	D 112	—	D 113	9.1 VZ
R 214	10K	D 115	—	D 114	—
R 215	10K	D 114	—	RB_C	33K
R 216	100K	D 115	LED (RED)	RA_C	1K5
R 217	3K3			RB_V	100K
R 218	10K			RB_V	100Ω

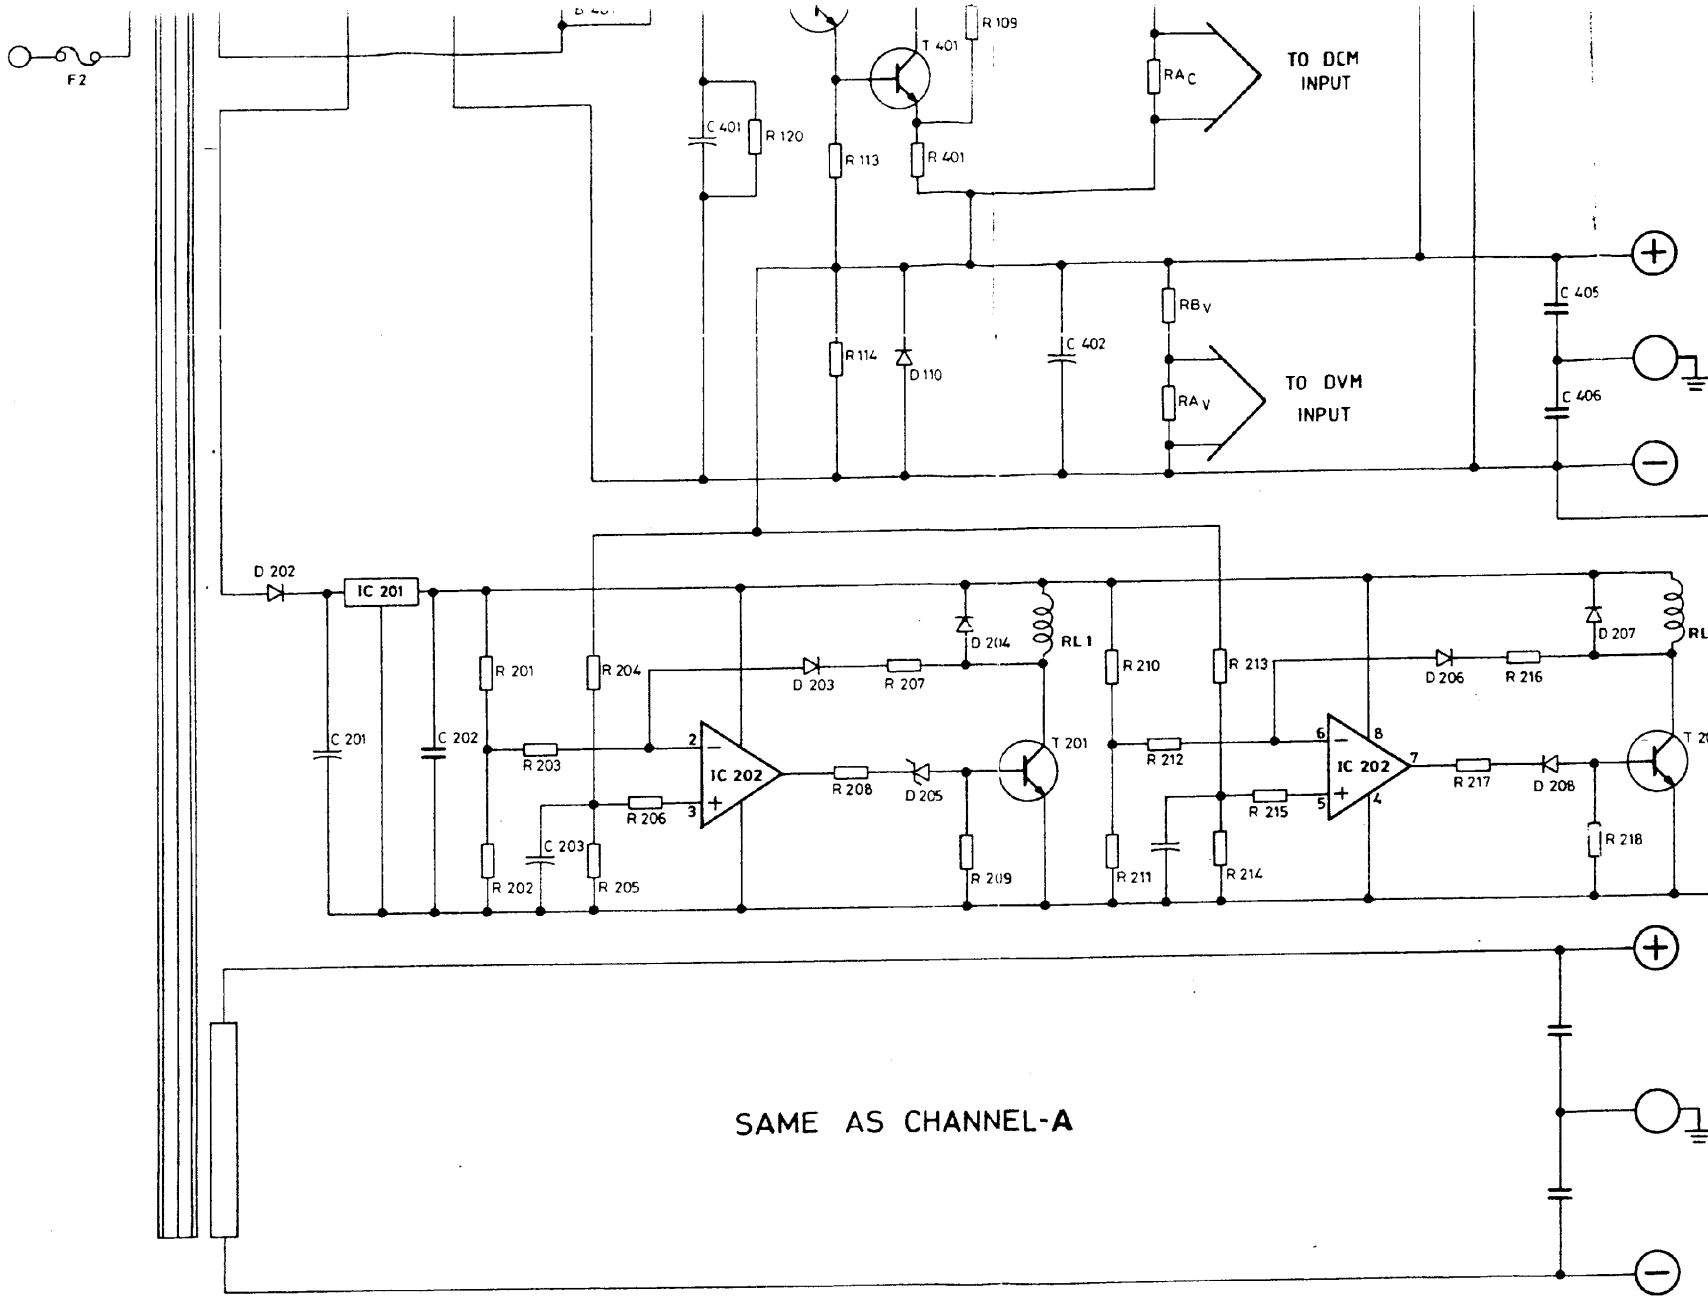


OUTPUT A
0 - 40V
0 - 3A

OUTPUT B
0 - 40V
0 - 3A

SAME AS CHANNEL-A

SCHEMATIC CIRCUIT DIAGRAM OF MODEL PS 2403

SONODYNE
MODEL :
DRN BY :

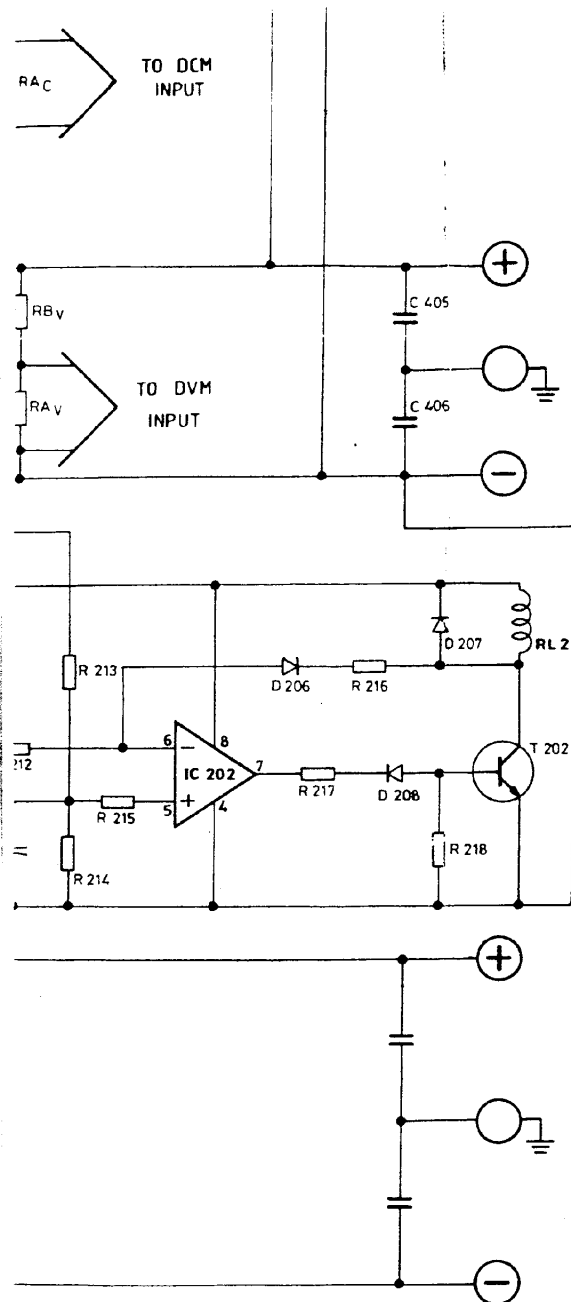

MODEL PS 2403

RELAY					
R 201	4K7			F 1	3.5 AMPS
R 202	3K3	D 101	1N 4002	F 2	3.0 AMPS
R 203	10K	D 102			FAST BLOW
R 204	56K	D 103	6.2V FZ		
R 205	33K	D 104	12V FZ		
R 206	10K	D 105	LED (RED)	DPM PCB	
R 207	100K	D 106	1N 4148	R 126	100 Ω 1/4 W
R 208	3K3	D 109	LED (GREEN)	R 127	
R 209	10K	D 108	1N 4002	C 108	100 / 16V
R 210	4K7	D 109		C 109	
R 211	3K3	D 110	LT 4A 03	D 111	1N 4002
R 212	10K	D 111	—	D 112	
R 213	47K	D 112	—	D 113	9.1 VZ
R 214	10K	D 115	—	D 114	
R 215	10K	D 114	—	R _B C	33K
R 216	100K	D 115	LED (RED)	R _A C	1K5
R 217	3K3			R _B V	100K
R 218	10K			R _B V	100 Ω

NOTE :-

ALL RESISTORS ARE 1/4W OHMS AND CAPACITORS IN MICROFARADS UNLESS SPECIFIED OTHERWISE.

ALL COMPONENTS OF CHANNEL B IS SAME AS CHANNEL A - IS LISTED.

PR 101 - VOLTAGE ADJUST PRESET - 220 Ω (CERACAR)

PR 102 - CURRENT ADJUST PRESET - 20K

PT 101 - VOLTAGE ADJUST POT - 10K (COARSE)

PT 102 - VOLTAGE ADJUST POT - 1K (FINE)

PT 103 - CURRENT ADJUST POT - 100K

SONODYNE INTL LIMITED., SEEPZ, BOMBAY

DATE: 9-2-96

MODEL : PS-2403

DRG. NO: SIL/16/0031

DRN BY :

CHD. BY :

APPD. BY :

REV. DATE

REV

ALTAf