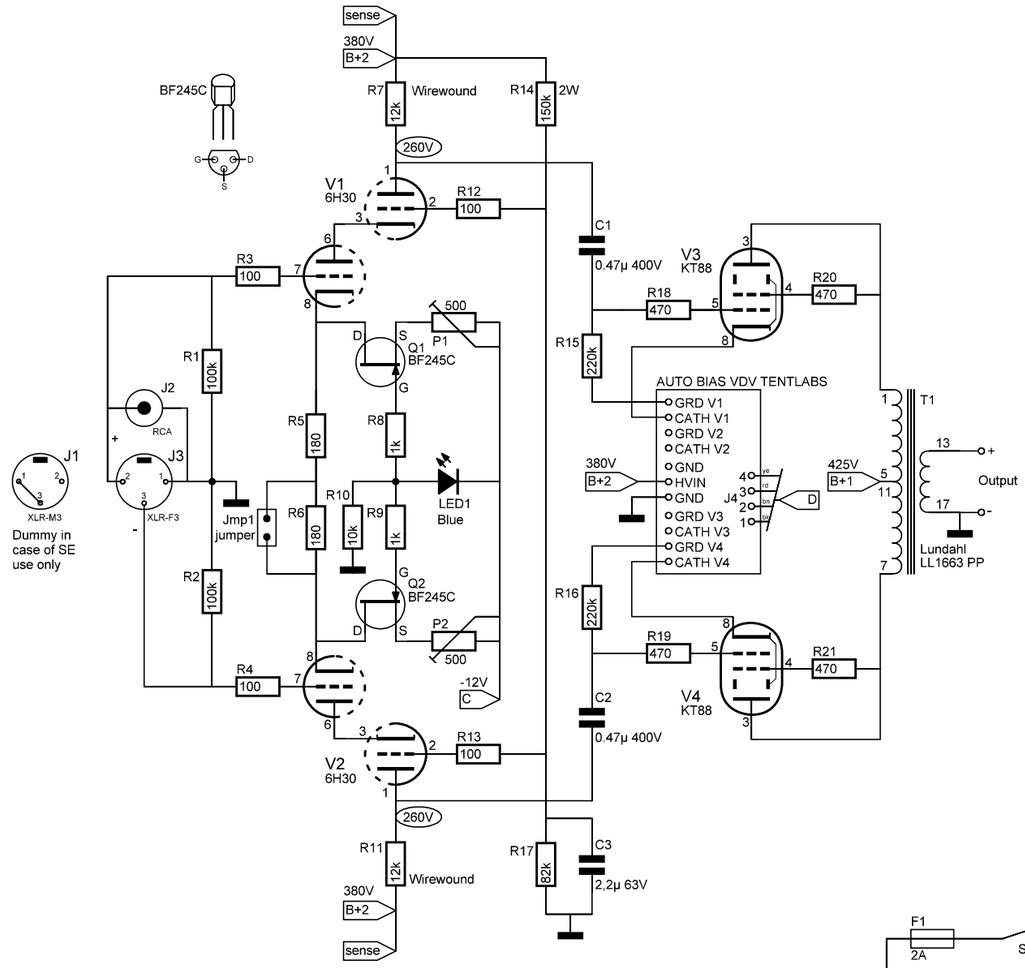

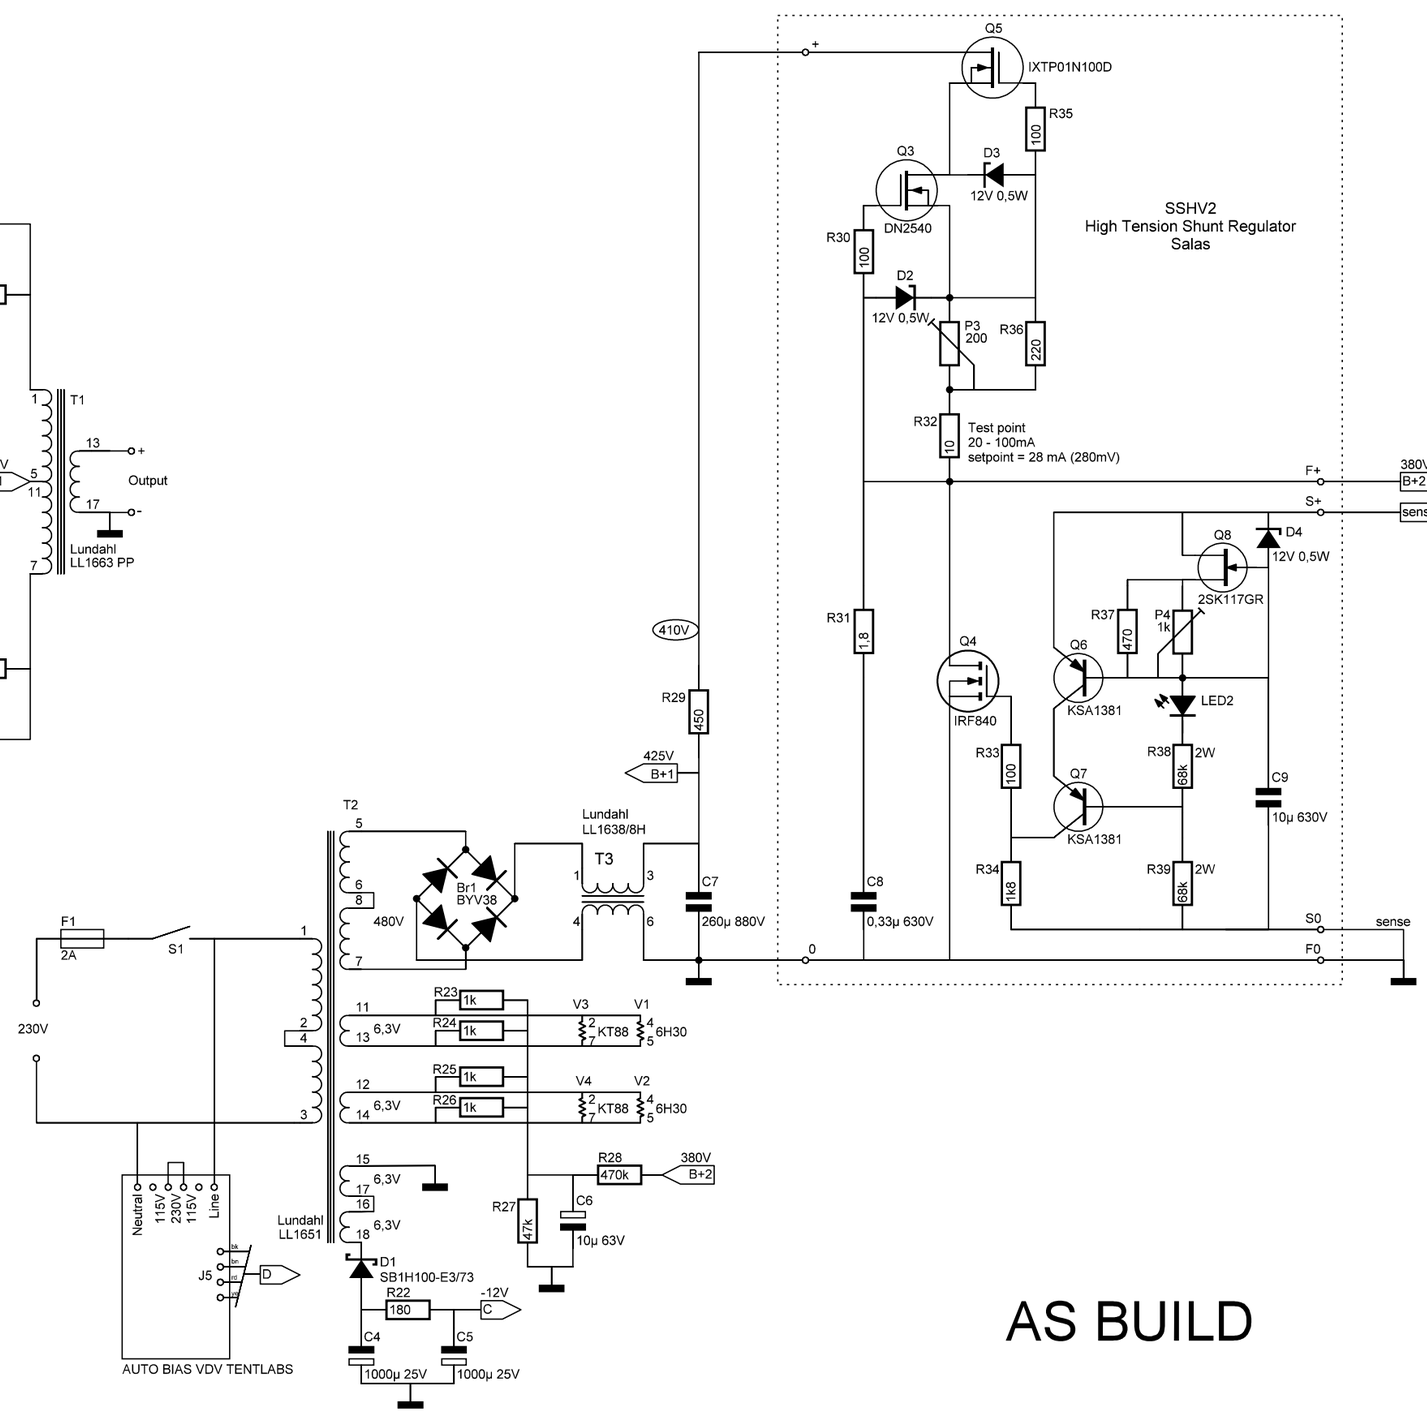

AS BUILD

Remarks
- All resistors are 1 watt metal film 1% unless otherwise marked. Non-magnetic preferred. Except 100 Ohm which are 1/4 watt metal film 1%
- For a single ended input, short the "–" input to gnd.
- Overall gain will be 20dB with Jmp1=1 (180R) for single ended input – or Jmp1=0 (350R) for differential input.
- Set trimmers P1 and P2 to obtain an equal 260V at the 6H30 anodes (circa 220R).
- Heatsink Q4: 3-4 K/W

Form	Date	Name
A3	25-8-2017	Rovano
	17-10-2017	

Description

Allen Wright - PP-2C
Tentlabs - Auto Bias
Salas - SSHV2