
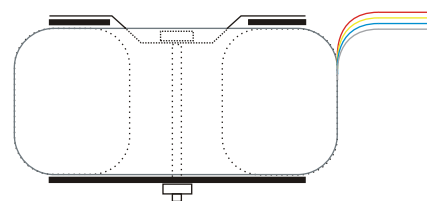
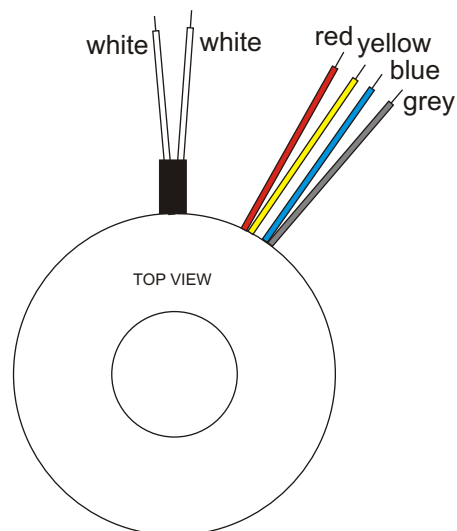
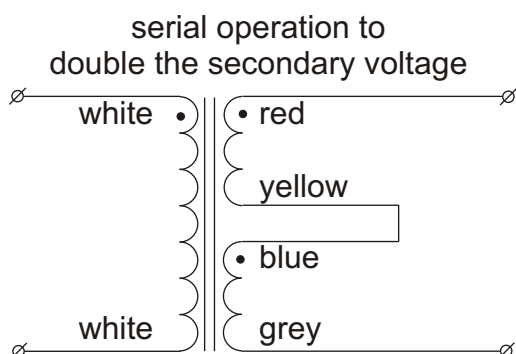
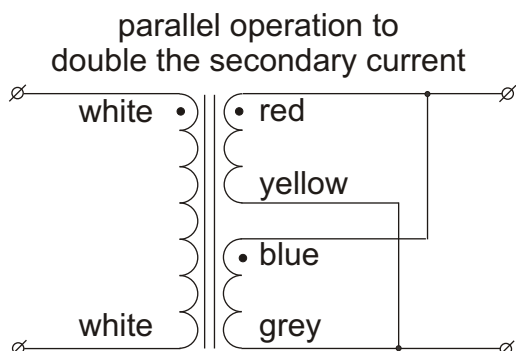


Toroidal transformer type 880xx

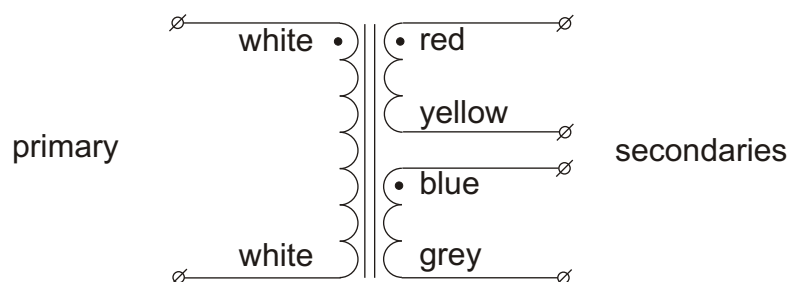

Diameter 135mm
Height 63mm
Weight 4.2kg
Height and weight are measured without mounting materials
All leads are solid and approx 200mm long

Supplied mounting materials:
1 metal washer Ø110mm
2 neoprene washers Ø110mm
1 bolt M8x70mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.
Primary: 2.5A, 5x20mm, IEC127, high I²t value
(additional inrush-current protection is necessary)
Secondary: none

Type number	primary	secondaries	
		voltage	current
88012	230V	2x 12V	20.8A
88013	230V	2x 15V	16.7A
88043	230V	2x 17V	14.7A
88014	230V	2x 18V	13.9A
88015	230V	2x 22V	11.4A
88016	230V	2x 25V	10.0A
88017	230V	2x 30V	8.33A
88019	230V	2x 33V	7.58A
88018	230V	2x 35V	7.14A
88026	230V	2x 40V	6.25A
88022	230V	2x 42V	5.95A
88025	230V	2x 45V	5.56A
88033	230V	2x 50V	5.00A
88042	230V	2x 55V	4.55A
88070	230V	2x 115V	2.17V

All voltages are under full ohmic load.
Regulation : 4.5%



Vossenbrinkweg 1
NL-7491DA DELDEN
The Netherlands

P O - B o x 2 4
NL-7490AA DELDEN
The Netherlands
Tel.+31 (0)74 376 3765
Fax+31 (0)74 376 3132

info@amplimo.nl
http://www.amplimo.nl

HB

April 2003

© Copyright Amplimo BV

880xx

**toroidal transformer
range 500VA**