


- FULL RANGE FREQUENCY RESPONSE
- ROUND STAMPING STEEL BASKET
- ALUM. PHASE PLUG
- PAPER CONE WITH SANTOPRENE SURROUND
- MAGNETICALLY SHIELDED
- ALUMINUM PHASE PLUG COOLING

3" PAPER FULL RANGE

DIAPHRAGM MTL	Silver Paper
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	8 W
DCR IMPEDANCE	6.6 W
SENSITIVITY 1W/1m	87 dB
FREQUENCY RESPONSE	110-20K Hz
FREE AIR RESONANCE	110 Hz
VOICE COIL DIAMETER	18 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	12 W
MAXIMUM POWER INPUT	25 W
FORCE FACTOR, BL	3.51 TM
MAGNET WEIGHT (4.4 oz)	125 g
MOVING MASS	2 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1133 uMN ⁻¹
EFFEC.PISTON AREA	0.0032 M ²
Levc	0.75 mH
Zo	38 ohm
X-max	0.5 mm
Vas	1.65 Litr.
Qts	0.59
Qms	3.40
Qes	0.71

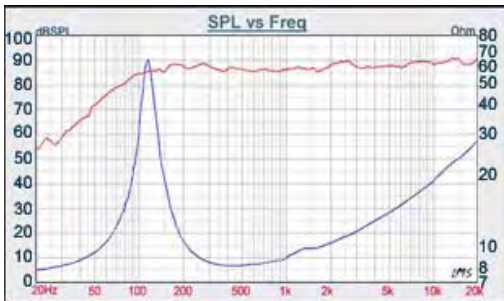

VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com

CLOSE