
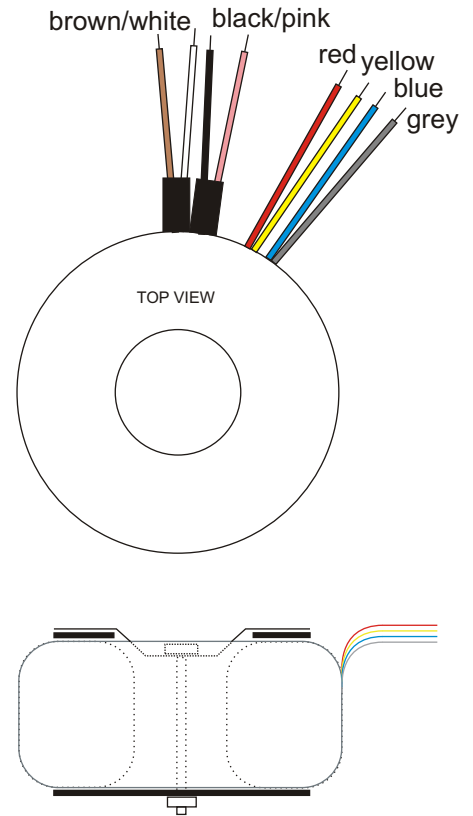
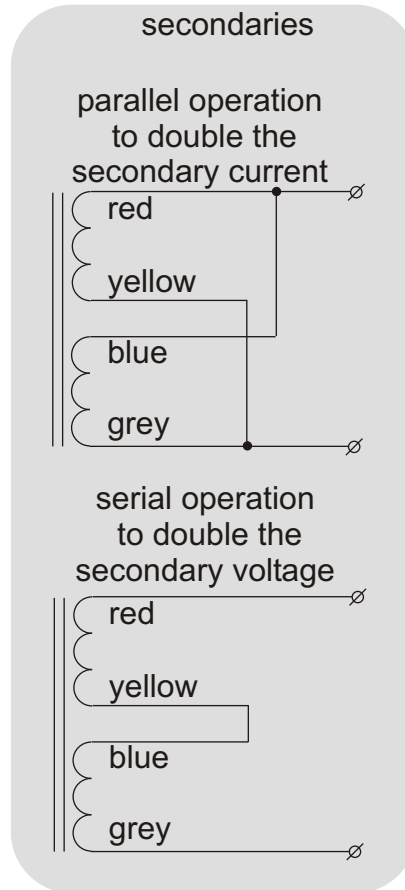
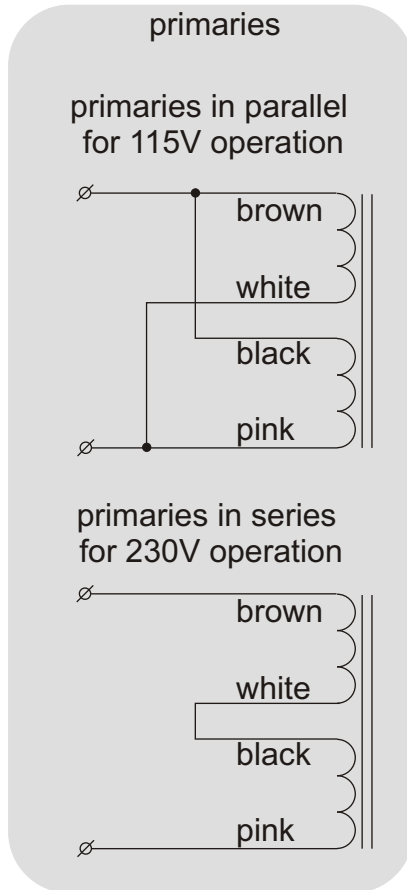


Toroidal transformer type 17010

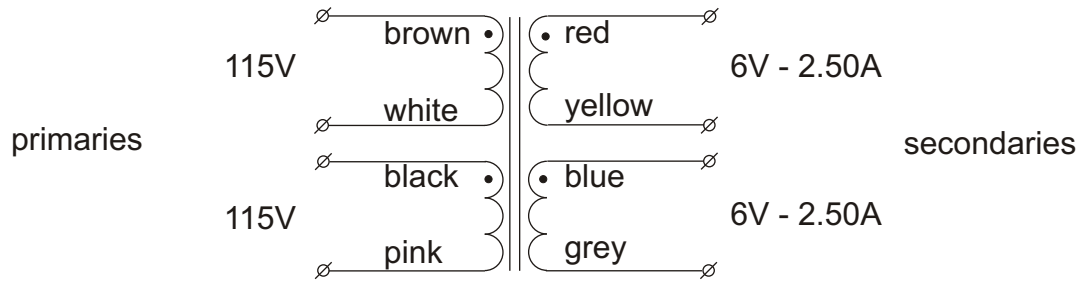

Diameter 70mm
Height 32mm
Weight 0.44kg
Height and weight are measured without mounting materials
All leads are solid and approx 200mm long


Supplied mounting materials:
1 metal washer Ø50mm
2 neoprene washers Ø50mm
1 bolt M5x40mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.
For 230V use: primary: 0.16A, 5x20mm, IEC127, high I²t value
secondary: none
For 115V use: primary: 0.315A, 5x20mm, IEC127, high I²t value
secondary: none

Type number	primary	secondaries voltage	current
17010	2x115V	2x 6V	2.50A

All voltages are under full ohmic load.
Regulation : 17%

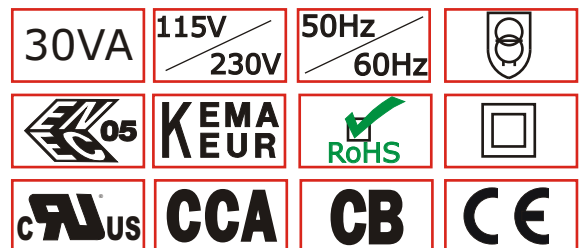

	Industrieweg 14 NL-7161BX NEEDE The Netherlands	HB	Oct 2010	17010
	P O - B o x 27 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 283456 Fax+31 (0)545 283457			
	info@amplimo.nl http://www.amplimo.nl			toroidal transformer range 30VA for 115V or 230V operation
	© Copyright Amplimo BV			