

## Metal Film Resistors, Industrial, Precision



### FEATURES

- Small size - conformal coated
- Flame retardant epoxy coating
- Controlled temperature coefficient
- Excellent high frequency characteristics
- Exceptionally low noise; typically 0.10  $\mu\text{V/V}$
- Low voltage coefficient to  $\pm 5$  ppm/V
- Compliant to RoHS directive 2002/95/EC
- Special tolerance and or TC matching available on request


**RoHS\***  
COMPLIANT

Vishay Dale Model CMF is also available as Military Qualified Styles RN and RL. See appropriate catalog or web page for the MIL-SPEC ratings/attributes. (Except for marking, the Industrial and Military versions are exactly the same. Depending upon stock, military marked parts may be supplied as industrial rated parts).

### STANDARD ELECTRICAL SPECIFICATIONS

| GLOBAL<br>MODEL | HISTORICAL<br>MODEL | MAXIMUM<br>WORKING<br>VOLTAGE <sup>(1)</sup><br>V | RESISTANCE RANGE Ω |                |            |            |            |            |            |            |            |
|-----------------|---------------------|---------------------------------------------------|--------------------|----------------|------------|------------|------------|------------|------------|------------|------------|
|                 |                     |                                                   | 0.1 % to 1 %       | 0.1 % to 0.5 % | 1 % to 5 % | 1 %        | 2 %, 5 %   | 1 %        | 2 %, 5 %   | 1 %        | 2 %, 5 %   |
|                 |                     |                                                   | 25 ppm/°C          | 50 ppm/°C      | 50 ppm/°C  | 100 ppm/°C | 100 ppm/°C | 150 ppm/°C | 150 ppm/°C | 200 ppm/°C | 200 ppm/°C |
| CMF50           | CMF-50              | 200                                               | 10 to 2.5M         | 10 to 2.5M     | 10 to 2.5M | 10 to 2.5M | 10 to 2.5M | 10 to 22M  | 10 to 22M  | 10 to 22M  | 10 to 22M  |
| CMF55           | CMF-55              | 250                                               | 10 to 2.5M         | 10 to 2.5M     | 10 to 5M   | 1 to 22.1M | 1 to 22.1M | 0.5 to 50M | 0.5 to 50M | 0.5 to 50M | 0.1 to 50M |
| CMF60           | CMF-60              | 500                                               | 10 to 2.5M         | 10 to 2.5M     | 10 to 10M  | 1 to 10M   | 1 to 10M   | 0.5 to 10M | 0.5 to 10M | 0.5 to 10M | 0.1 to 10M |
| CMF65           | CMF-65              | 500                                               | 10 to 2.5M         | 10 to 2.5M     | 10 to 10M  | 1 to 15M   | 1 to 15M   | 0.5 to 22M | 0.5 to 22M | 0.5 to 22M | 0.1 to 22M |
| CMF70           | CMF-70              | 500                                               | 10 to 2.5M         | 10 to 2.5M     | 10 to 10M  | 1 to 15M   | 1 to 15M   | 1 to 22M   | 1 to 22M   | 1 to 22M   | 1 to 22M   |
| CMF07           | CMF-07              | 250                                               | -                  | -              | -          | -          | 5 to 5M    | -          | 1 to 5M    | -          | 1 to 5M    |
| CMF20           | CMF-20              | 500                                               | -                  | -              | -          | -          | 5 to 10M   | -          | 1 to 10M   | -          | 1 to 10M   |

#### Note

<sup>(1)</sup> Continuous working voltage shall be  $\sqrt{P \times R}$  or maximum working voltage, whichever is less

### MAXIMUM COMMERCIAL POWER RATING

| WATTAGE <sup>(2)</sup>      | MODEL   |        |       |        |        |       |       |
|-----------------------------|---------|--------|-------|--------|--------|-------|-------|
|                             | CMF50   | CMF55  | CMF60 | CMF65  | CMF70  | CMF07 | CMF20 |
| At + 70 $^{\circ}\text{C}$  | 0.25 W  | 0.5 W  | 1 W   | 1 W    | 1 W    | 0.5 W | 1 W   |
| At + 125 $^{\circ}\text{C}$ | 0.125 W | 0.25 W | 0.5 W | 0.75 W | 0.75 W | -     | -     |

#### Note

<sup>(2)</sup> See the load life shift due to power and derating table for a summary of the more common combinations of power rating, case size and ambient operating temperature that prevail in various industrial and military resistor specifications. The "performance" table qualifies the load life stability under these combinations.

### GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: CMF55301R00FKRE (preferred part numbering format)

| GLOBAL MODEL                                   | RESISTANCE VALUE                                                                                                                                                                                  | TOLERANCE CODE                                                                                                                                      | TEMPERATURE COEFFICIENT <sup>(3)</sup>                                                                   | PACKAGING                                                                                                                                                                                                                                | SPECIAL                                                                                                                                                                                  |
|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (See Standard Electrical Specifications table) | <b>R</b> = $\Omega$<br><b>K</b> = $\text{k}\Omega$<br><b>M</b> = $\text{M}\Omega$<br><b>R10000</b> = 0.1 $\Omega$<br><b>680K00</b> = 680 $\text{k}\Omega$<br><b>1M0000</b> = 1.0 $\text{M}\Omega$ | <b>B</b> = $\pm 0.1$ %<br><b>C</b> = $\pm 0.25$ %<br><b>D</b> = $\pm 0.5$ %<br><b>F</b> = $\pm 1$ %<br><b>G</b> = $\pm 2$ %<br><b>J</b> = $\pm 5$ % | <b>E</b> = 25 ppm<br><b>H</b> = 50 ppm<br><b>K</b> = 100 ppm<br><b>L</b> = 150 ppm<br><b>N</b> = 200 ppm | <b>EK</b> = Lead (Pb)-free, bulk<br><b>EA</b> = Lead (Pb)-free, T/R (full)<br><b>EB</b> = Lead (Pb)-free, T/R (1000 pieces)<br><b>BF</b> = Tin/lead, bulk<br><b>RE</b> = Tin/lead, T/R (full)<br><b>R6</b> = Tin/lead, T/R (1000 pieces) | Blank = Standard (Dash Number) (Up to 3 digits) From <b>1 to 999</b> as applicable<br><b>70</b> = Color banded, 5 bands ( $\leq 1$ %)<br><b>80</b> = Color banded, 4 bands ( $\geq 2$ %) |

Historical Part Number example: CMF-553010FT-1 (will continue to be accepted)

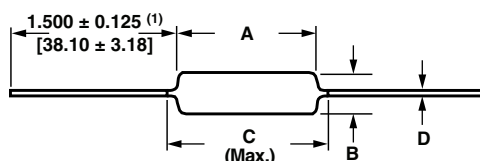
|                  |                  |                |                   |           |
|------------------|------------------|----------------|-------------------|-----------|
| CMF-55           | 3010             | F              | T-1               | R36       |
| HISTORICAL MODEL | RESISTANCE VALUE | TOLERANCE CODE | TEMP. COEFFICIENT | PACKAGING |

#### Note

<sup>(3)</sup> Tolerances of  $\pm 0.5$  % (D),  $\pm 0.25$  % (C) and  $\pm 0.1$  % (B) are available only in 50 ppm and 25 ppm temperature coefficients

\* Pb containing terminations are not RoHS compliant, exemptions may apply

# DIMENSIONS in inches (millimeters)



| GLOBAL MODEL | A                                             | B                              | C (Max.)                    | D                                             |
|--------------|-----------------------------------------------|--------------------------------|-----------------------------|-----------------------------------------------|
| CMF50        | 0.150 ± 0.020<br>(3.81 ± 0.51)                | 0.065 ± 0.015<br>(1.65 ± 0.38) | 0.187 (4.75)                | 0.016 ± 0.002<br>(0.41 ± 0.05)                |
| CMF55        | 0.240 ± 0.020 <sup>(4)</sup><br>(6.10 ± 0.51) | 0.090 ± 0.008<br>(2.29 ± 0.20) | 0.278 (7.06) <sup>(3)</sup> | 0.025 ± 0.002<br>(0.64 ± 0.05)                |
| CMF60        | 0.344 ± 0.031<br>(8.74 ± 0.79)                | 0.145 ± 0.015<br>(3.68 ± 0.38) | 0.425 (10.80)               | 0.025 ± 0.002 <sup>(2)</sup><br>(0.64 ± 0.05) |
| CMF65        | 0.562 ± 0.031<br>(14.27 ± 0.79)               | 0.180 ± 0.015<br>(4.57 ± 0.38) | 0.687 (17.45)               | 0.025 ± 0.002<br>(0.64 ± 0.05)                |
| CMF70        | 0.562 ± 0.031<br>(14.27 ± 0.79)               | 0.180 ± 0.015<br>(4.57 ± 0.38) | 0.687 (17.45)               | 0.032 ± 0.002<br>(0.81 ± 0.05)                |
| CMF07        | 0.240 ± 0.020<br>(6.10 ± 0.51)                | 0.090 ± 0.008<br>(2.29 ± 0.20) | 0.278 (7.06)                | 0.025 ± 0.002<br>(0.64 ± 0.05)                |
| CMF20        | 0.375 ± 0.040<br>(9.53 ± 1.02)                | 0.145 ± 0.015<br>(3.68 ± 0.38) | 0.425 (10.80)               | 0.032 ± 0.002<br>(0.81 ± 0.05)                |

## Notes

(1) 1.08" ± 0.125" (27.43 mm ± 3.18 mm) if tape and reel

(2) Available with 0.032" (0.813 mm) lead [CMF60..95]

(3) 0.290" (7.37 mm) for ± 0.25 % and ± 0.1 % resistance tolerances and values > 1 MΩ

(4) 0.260" ± 0.020" (6.60 mm ± 0.51 mm) for values > 5 MΩ

## TECHNICAL SPECIFICATIONS

| PARAMETER                     | UNIT             | CMF50                                                                                                      | CMF55 | CMF07 | CMF60 | CMF20 | CMF65 | CMF70 |
|-------------------------------|------------------|------------------------------------------------------------------------------------------------------------|-------|-------|-------|-------|-------|-------|
| Maximum Working Voltage       | V <sub>≡</sub>   | ≤ 200                                                                                                      | ≤ 250 | ≤ 250 | ≤ 500 | ≤ 500 | ≤ 500 | ≤ 500 |
| Insulation Voltage (1 Min)    | V <sub>eff</sub> | > 500                                                                                                      |       |       |       |       |       |       |
| Voltage Coefficient (Max.)    | ppm/V            | ± 5 (measured between 10 % and full rated voltage)                                                         |       |       |       |       |       |       |
| Dielectric Strength           | V <sub>AC</sub>  | 450                                                                                                        | 450   | 450   | 750   | 750   | 900   | 900   |
| Insulation Resistance         | Ω                | ≥ 10 <sup>11</sup>                                                                                         |       |       |       |       |       |       |
| Operating Temperature Range   | °C               | - 55 to + 175                                                                                              |       |       |       |       |       |       |
| Terminal Strength (Pull Test) | lb               | 2                                                                                                          | 2     | 5     | 2     | 5     | 2     | 5     |
| Noise                         | dB               | 0.10 μV/V over a decade of frequency, with low and intermediate resistance values typically below 0.5 μV/V |       |       |       |       |       |       |
| Weight (Max.)                 | g                | 0.12                                                                                                       | 0.20  | 0.20  | 0.50  | 0.60  | 1.00  | 1.10  |

## TEMPERATURE COEFFICIENT CODES

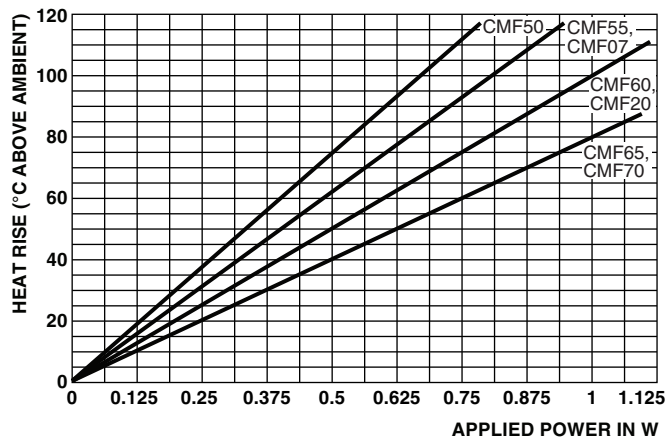
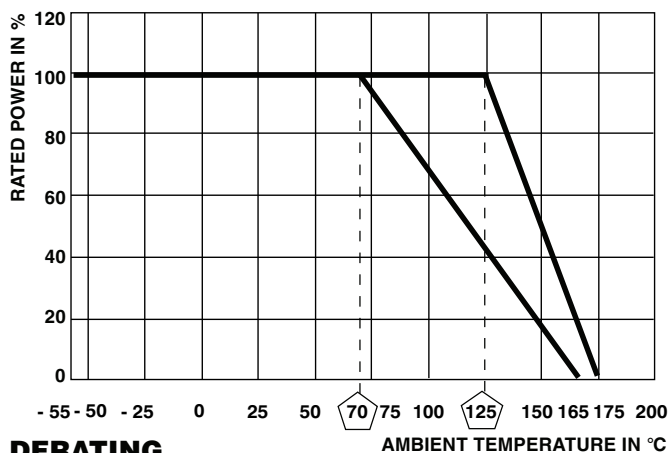
| GLOBAL TC CODE | HISTORICAL TC CODE | TEMPERATURE COEFFICIENT |
|----------------|--------------------|-------------------------|
| E              | T-9                | 25 ppm/°C               |
| H              | T-2                | 50 ppm/°C               |
| K              | T-1                | 100 ppm/°C              |
| L              | T-0                | 150 ppm/°C              |
| N              | T-00               | 200 ppm/°C              |

**LOAD LIFE SHIFT DUE TO POWER AND DERATING (AT 70 °C AND AT + 125 °C)**

The power rating for the CMF parts is tied to the derating temperature, the heat rise of the parts, and the  $\Delta R$  for the load life performance. When the tables/graphs below are used together they show that when the parts are run at their higher power ratings, the parts will run hotter, which has the potential of causing the resistance of the parts to shift more over the life of the part.

| LOAD LIFE SHIFT VS. POWER RATING |                                        |             |               |                          |             |             |
|----------------------------------|----------------------------------------|-------------|---------------|--------------------------|-------------|-------------|
| LOAD LIFE                        | MAXIMUM $\Delta R$ (TYPICAL TEST LOTS) |             |               |                          |             |             |
|                                  | $\pm 0.15\%$                           | $\pm 0.5\%$ | $\pm 1.0\%$   | $\pm 0.15\%$             | $\pm 0.5\%$ | $\pm 1.0\%$ |
| MODEL                            | POWER RATING AT + 70 °C                |             |               | POWER RATING AT + 125 °C |             |             |
| CMF50                            | 1/20 W and 1/10 W                      | 1/8 W       | 1/4 W         | 1/20 W                   | 1/10 W      | 1/8 W       |
| CMF55, CMF07                     | 1/10 W and 1/8 W                       | 1/4 W       | 1/2 W         | 1/10 W                   | 1/8 W       | 1/4 W       |
| CMF60, CMF20                     | 1/8 W and 1/4 W                        | 1/2 W       | 3/4 W and 1 W | 1/8 W                    | 1/4 W       | 1/2 W       |
| CMF65                            | 1/4 W and 1/2 W                        | 3/4 W       | 1 W           | 1/4 W                    | 1/2 W       | 3/4 W       |
| CMF70                            | 1/4 W and 1/2 W                        | 3/4 W       | 1 W           | 1/4 W                    | 1/2 W       | 3/4 W       |

CMF resistors have an operating temperature range of - 55 °C to + 175 °C. They must be derated at high ambient temperatures according to the derating curve.


**MATERIAL SPECIFICATIONS**

|                 |                                      |                       |                                                                             |
|-----------------|--------------------------------------|-----------------------|-----------------------------------------------------------------------------|
| <b>Element:</b> | Vacuum-deposited nickel-chrome alloy | <b>Coating:</b>       | Flame retardant epoxy, formulated for superior moisture protection          |
| <b>Core:</b>    | Fire-cleaned high purity ceramic     | <b>Solderability:</b> | Continuous satisfactory coverage when tested in accordance with MIL-R-10509 |

**SPECIAL MODIFICATIONS**

1. Terminals may be supplied in any commercial material with several type finishes.
2. Special pre-conditioning (power aging, temperature cycling, etc.) to customer specifications.
3. Non-helixed resistors can be supplied for critical high frequency applications.
4. Fusible, flameproof versions available.

**MARKING**

- Value  
- Decade and tolerance  
- Date code  
(Alternately, parts may be MIL marked)

**Note**

- CMF07 and CMF20 parts are marked with color bands, either per MIL-PRF-22684 (with a wide white band) or using commercial color bands. CMFxx..70 and CMFxx..80 parts are marked using commercial color bands.

**PERFORMANCE**

| TEST<br>(TEST METHODS - MIL-STD-202) | AT + 70 °C                                                                             | AT + 125 °C   |
|--------------------------------------|----------------------------------------------------------------------------------------|---------------|
|                                      | MAXIMUM $\Delta R$ (TYPICAL TEST LOTS)                                                 |               |
| Short Time Overload                  | $\pm 0.05 \%$                                                                          | $\pm 0.05 \%$ |
| Low Temperature Operation            | $\pm 0.05 \%$                                                                          | $\pm 0.05 \%$ |
| Moisture Resistance                  | $\pm 0.05 \%$                                                                          | $\pm 0.05 \%$ |
| Shock                                | $\pm 0.01 \%$                                                                          | $\pm 0.01 \%$ |
| Vibration                            | $\pm 0.004 \%$                                                                         | $\pm 0.04 \%$ |
| Temperature Cycling                  | $\pm 0.15 \%$                                                                          | $\pm 0.15 \%$ |
| Load Life                            | Varies based on power rating used; see load life shift due to power and derating table |               |
| Dielectric Withstanding Voltage      | $\pm 0.01 \%$                                                                          | $\pm 0.01 \%$ |
| Effect of Solder                     | $\pm 0.03 \%$                                                                          | $\pm 0.03 \%$ |



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.