
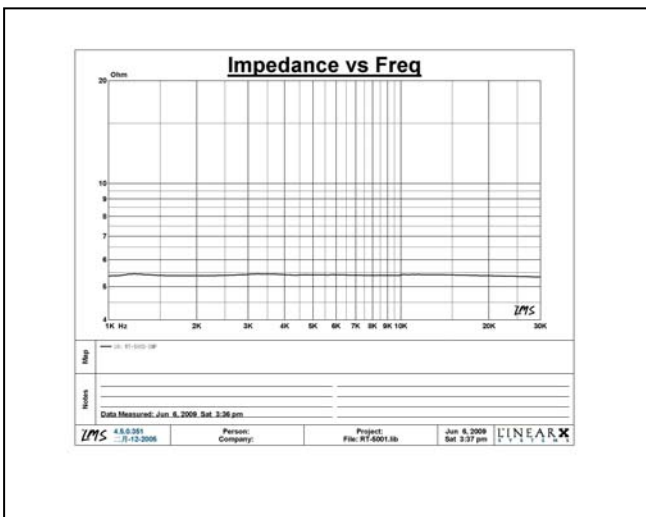
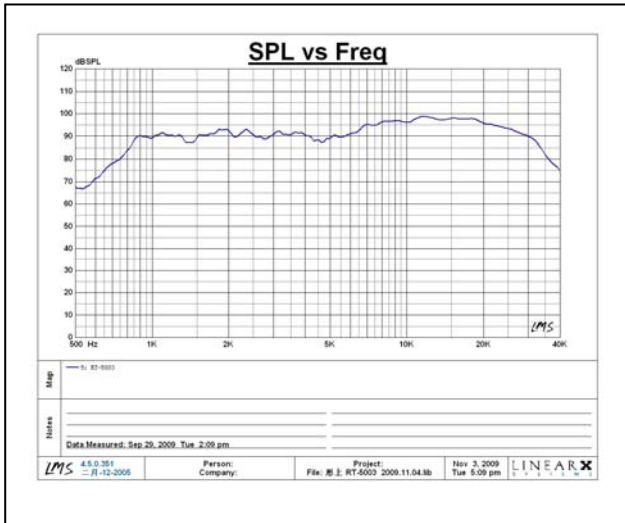


HYGEIA Electron Co.,Ltd.


日期[Date] _____ 客户[Customer] _____

客户承认签章
[Approved By]

型号[Model] RT-5003 编号[File NO.] _____

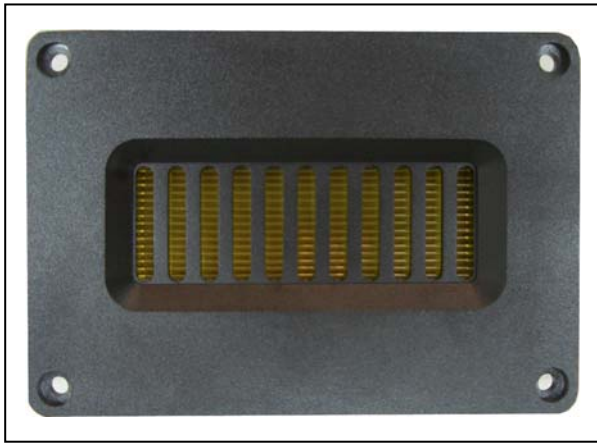

基本应用参数 [Basic Application Parameter]		
参数名称 [Parameter Name]	规格 [Spec.]	备注 [Note]
额定频率范围 [Frequency Range]	850HZ-30KHZ	
耐温耐湿度 [Support Temp. & Humidity]	60℃ 85%R. H. 24HR	
额定阻抗 [Rated Impedance]	5 Ω	
额定功率 [Rated Power]	40 W	With-12db/ Oct. Net work
瞬间功率 [Peak Power]	60 W	
灵敏度 [Sensitivity]	92 ±2dB	
重量 (Weight)	565g±5%	

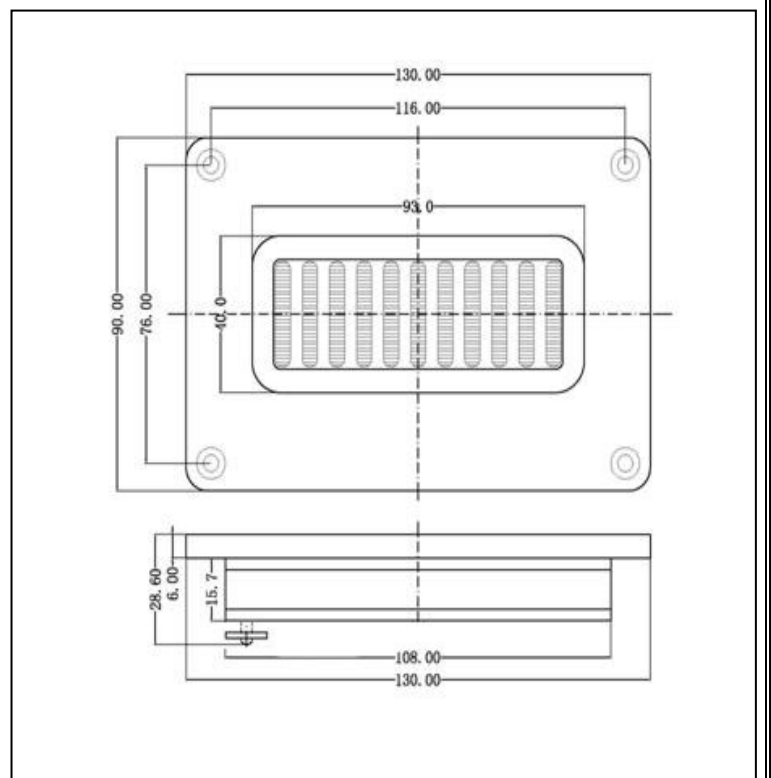

核准 [Approved]	审查 [Checked]	品管 [Q.C]	制表 [Edition]	版次 [Version]	修订内容 [Alteration Substance]	确认 [Approved]
			洪梅	A		