


- FULL RANGE DESIGN
- HOME HI-FI, HOME THEATER, MID BASS APPLICATION
- DIE CAST BASKET
- PAPER CONE WITH RUBBER SURROUND
- MAGNETICALLY SHIELDED
- CCAW WITH KAPTON BOBBIN
- ALUMINUM PHASE PLUG

4" PAPER CONE/FULL RANGE, WOOFER

DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 W
DCR IMPEDANCE	6 W
SENSITIVITY 1W/1m	89 dB
FREQUENCY RESPONSE	70-14K Hz
FREE AIR RESONANCE	70 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	25 W
MAXIMUM POWER INPUT	50 W
FORCE FACTOR, BL	5.84 TM
MAGNET WEIGHT (11oz)	305 g
MOVING MASS	3.99 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1303 μMN^{-1}
EFFEC.PISTON AREA	0.0057 M ²
Levc	0.124 mH
Zo	102 ohm
X-max	3.3 mm
Vas	6.01 Litr.
Qts	0.29
Qms	5.57

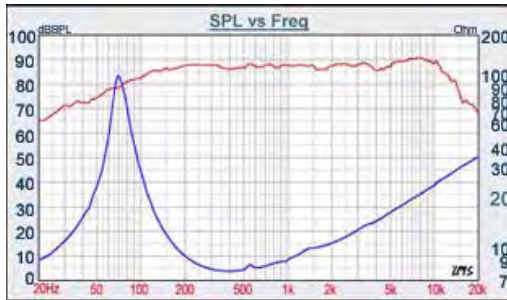

VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com

Qes 0.31

CLOSE